



# 3M™ Liqui-Cel™ SP-4×28 Series Membrane Contactor

## Typical Properties

Membrane Characteristics		
Cartridge Configuration	Extra-Flow with Center Baffle	
Liquid Flow Guidelines	1.1-6.8 m³/hr (5-30 gpm) Liquid must flow on the shellside	
Membrane/Potting Material	Polyolefin / Polyethylene	
Priming Volume (approximate)	<b>Polypropylene</b>	<b>316L SS</b>
Shellside	2.9 L (0.8 gal)	2.9 L (0.8 gal)
Lumenside	0.9 L (0.2 gal)	0.7 L (0.2 gal)


Pressure Guidelines*		
Maximum Shellside <b>LIQUID</b> Working Temperature/Pressure	<b>Polypropylene</b>	<b>316L SS</b>
	5-25°C, 4.1 barg (41-77°F, 60 psig) 40°C, 1.0 barg (104°F, 15 psig)	5-25°C, 4.1 barg (41-77°F, 60 psig) 50°C, 1.0 barg (122°F, 15 psig)
If no vacuum is used, 1 barg (15 psig) can be added to pressures above.		
Maximum Applied Gas Pressure	4.1 barg at 25°C (60 psig at 77°F)	
* See Operating Guide for complete temp/pressure limits for housings and membrane. <b>Note:</b> Liquid pressure should always exceed gas pressure.		

Housing Characteristics		
Material	<b>Polypropylene</b>	<b>316L SS</b>
Flange Connections		
Shellside (Wetted surface)	<ul style="list-style-type: none"> <li>• 1 inch Sanitary</li> <li>• ¾ inch NPT Female</li> <li>• Rc ¾ per JIS B0203</li> </ul>	• 1 inch Sanitary
Lumenside (Gas/Vacuum)	<ul style="list-style-type: none"> <li>• 1 inch 90° Sanitary</li> <li>• ¾ inch 90° NPT Female</li> <li>• Rc ¾ per JIS B0203</li> </ul>	• 1 inch Sanitary

Seal Material Options	Applications
FKM	General Purpose
FFKM (K - UPW)**	Ultra Pure Water
**Only available in PP housing with NPT connections.	



Weight (approximate)	Polypropylene	316L SS
Dry	4 kg (9 lbs)	7 kg (16 lbs)
Water-filled	7 kg (16 lbs)	10 kg (22 lbs)

**Regulatory**  
Complies with the limits as set by RoHS Directive 2011/65/EU Annex II. 3M™ Liqui-Cel™ SP-4×28 Series Membrane Contactors with FKM seals are constructed of FDA Title 21 CFR § 177-190 compliant materials for wetted parts only at ambient temperatures. 3M™ Liqui-Cel™ SP-4×28 Series Membrane Contactors with FFKM (K-UPW) seals are not constructed of FDA Title 21 CFR § 177-190 compliant materials.

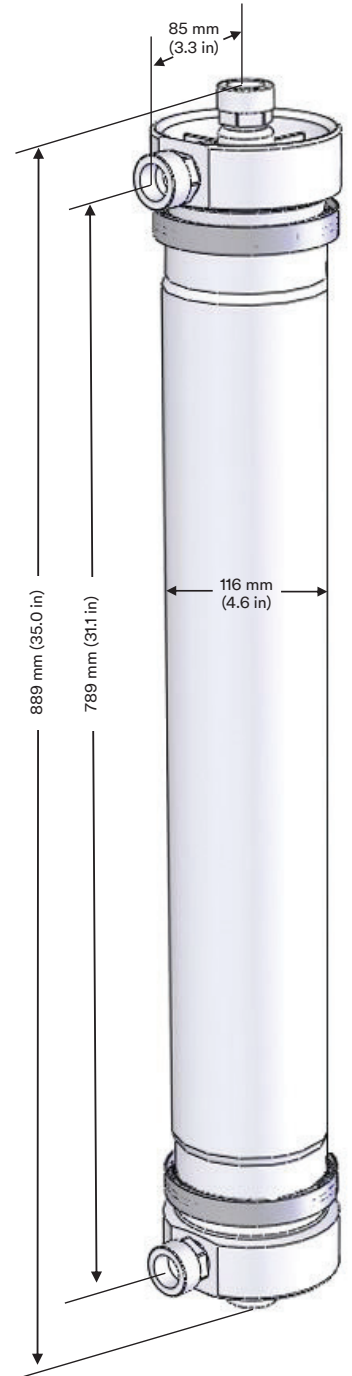

All dimensions are nominal values for the polypropylene housing with NPT connections. See full housing drawing on 3M.com/Liqui-Cel for additional details.

# 3M™ Liqui-Cel™ SP-4x28 Series Membrane Contactor

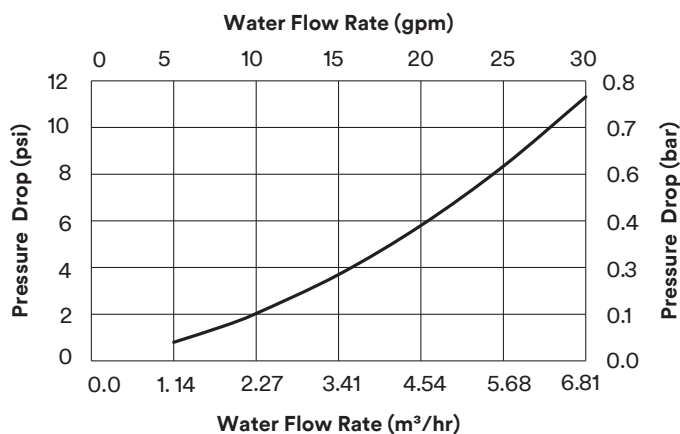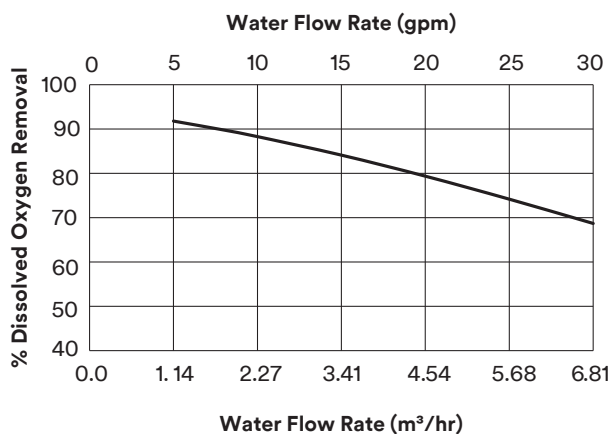

Curves represent nominal values, generated using water at 25°C (77°F).

Test condition: O<sub>2</sub> Removal with 50 torr abs vacuum.

Characteristics may change under different operating conditions.

Product Selection and Use
Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. As a result, customer is solely responsible for evaluating the product and determining whether it is appropriate and suitable for customer's application, including conducting a workplace hazard assessment and reviewing all applicable regulations and standards (e.g., OSHA, ANSI, etc.). Failure to properly evaluate, select, and use a 3M product and appropriate safety products, or to meet all applicable safety regulations, may result in injury, sickness, death, and/or harm to property.
Warranty, Limited Remedy, and Disclaimer
Unless a different warranty is specifically stated on the applicable 3M product packaging or product literature (in which case such warranty governs), 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR ARISING OUT OF A COURSE OF DEALING, CUSTOM, OR USAGE OF TRADE. If a 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.
Limitation of Liability
Except for the limited remedy stated above, and except to the extent prohibited by law, 3M will not be liable for any loss or damage arising from or related to the 3M product, whether direct, indirect, special, incidental, or consequential (including, but not limited to, lost profits or business opportunity), regardless of the legal or equitable theory asserted, including, but not limited to, warranty, contract, negligence, or strict liability.



3M and Liqui-Cel are trademarks of 3M Company. All other trademarks are the property of their respective owners.  
 © 2019 3M Company. All rights reserved.



**Separation and Purification Sciences Division**  
 13840 South Lakes Drive  
 Charlotte, North Carolina  
 28273 USA  
 Phone: +1 980 859 5400

**3M Deutschland GmbH Separation and Purification Sciences Division**  
 Öhder Straße 28  
 42289 Wuppertal Germany  
 Phone: +49 202 6099 - 0  
 Fax: +49 202 6099 - 241

LC-1082  
 REV 1/2019  
**3M.com/Liqui-Cel**