

3M™ ZVS & ZMS Series Sanitary Design Filter Housings

3M™ Sanitary Style ZVS and ZMS Series Filter Housings are designed for critical clarification and sterile filtration applications. Manufactured to strict quality standards and from high quality materials, the ZVS and ZMS Series Filter Housings meet the exacting requirements of the pharmaceutical, biotechnology, food & beverage and microelectronics industries. ZVS and ZMS Series Filter Housings are designed for liquid or gas service and can easily be cleaned-in-place (CIP), steamed-in-place (SIP) or hot water sanitized.

The 316L stainless steel in-line ZVS Series and T-line ZMS Series Filter Housings accept one Code 7 style filter element (226 double O-rings with locking tabs with a spear top) in 10 in., 20 in. or 30 in. length. All ZVS and ZMS Series Filter Housings are equipped with 1/2 in. sanitary vent and drain ports; vent and drain valves are available as optional accessories. The ZMS Series Filter Housing is also equipped with a 1-1/2 in. sanitary gauge port. The inlet and outlet connections are 1-1/2 in. sanitary fittings for the ZVS Series Filter Housing and 1 in. sanitary for the ZMS Series Filter Housing.

ZVS and ZMS Series Filter Housings are offered in a high quality polished surface finish for ease of cleaning. Wetted surfaces are electropolished to a 25 micro-inch Ra surface finish to help limit bacterial and particulate adhesion.

The bayonet cartridge interlock design allows easy cleaning, and the positive locking retention mechanism secures the filter cartridge even during back pressure surges. A 306 stainless steel clamp secures the housing base and dome permitting rapid filter change-outs. Each filter housing is hydrostatically tested to confirm pressure-rating performance. All housings are supplied with silicone gaskets that comply with CFR 21 requirements for direct food and drug contact.

Features & Benefits

316L Stainless Steel Construction

- Excellent corrosion resistance provides long term service

High Quality Surface Finish (25 micro-inch Ra Internal)

- Helps minimize bacterial/particulate adhesion

Housings Accommodate One 10 in., 20 in. or 30 in. Filter Cartridge

- Suitable for small to intermediate product batches and tank vent applications

Accepts Code 7 Style 226 Double O-ring Bayonet Lock Cartridge

- Cartridge locks into place providing secure installation even under back pressure conditions

Sanitary Design Vent and Drain (Optional Drain Valves Available)

- Easy to clean, helps limit cross contamination, no threaded parts in contact with process fluids

Clean-in-Place (CIP)/Steam-in-Place (SIP) Design

- Permits easy cleaning, sterilization or sanitization in place (*in-situ*)




3M™ ZVS & ZMS Series Ordering Guide

Operating Parameters and Specifications

Filter Model	Description	Part Number
1ZMS1	10 in. Filter Sanitary T-line Housing	7062801
1ZMS2	20 in. Filter Sanitary T-line Housing	7062802
1ZMS3	30 in. Filter Sanitary T-line Housing	7062803
1ZVS1	10 in. Filter Sanitary In-line Housing	7062701
1ZVS2	20 in. Filter Sanitary In-line Housing	7062702
1ZVS3	30 in. Filter Sanitary In-line Housing	7062703
Optional	1/2 in. Sanitary: 8mm Barb Vent/Drain Diaphragm Valve	6049401

PLEASE NOTE: The Ordering Guide above is for reference only. Please consult with your 3M Representative to determine the appropriate part number for your application.

Figure 1. ZVS Series (left) and ZMS Series (right) Filter Housing Dimensions

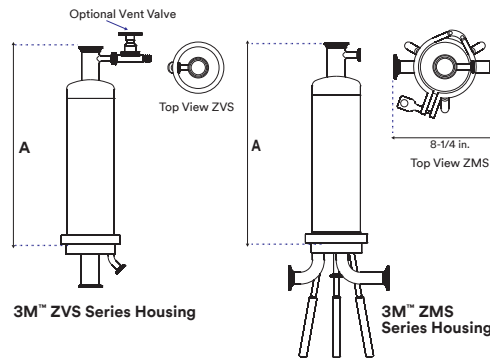

Connections	
Inlet/Outlet — ZMS	1 in. sanitary fitting
Inlet/Outlet — ZVS	1-1/2 in. sanitary fitting
Vent Drain — ZMS and ZVS	1/2 in. sanitary fitting
Gauge Port (ZMS T-line only)	1-1/2 in. sanitary fitting
Filter Cartridge Style	
1ZVS/1ZMS Housing: Code 7, double 226 O-ring with bayonet locking tabs and spear top	
Shipping Weight	
1ZVS1/1ZMS1	11 lbs. (5 kg)
1ZVS2/1ZMS2	16 lbs. (7 kg)
1ZVS3/1ZMS3	20 lbs. (9 kg)
Maximum Allowable Working Pressure	
150 psig (10.3 Bar)	
Maximum Temperature	
212°F (100°C)	
Sterilization/Sanitization	
In-situ steam sterilization	30 minutes @ 250°F (121°C)
Hot water sanitization	30 minutes @ 176°F (80°C)
Dimensions	
1ZVS1/1ZMS1	16-1/4 in. (413 mm)
1ZVS2/1ZMS2	26 in. (660 mm)
1ZVS3/1ZMS3	35-3/4 in. (908 mm)

Product Selection and Use

Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. As a result, customer is solely responsible for evaluating the product and determining whether it is appropriate and suitable for customer's application, including conducting a workplace hazard assessment and reviewing all applicable regulations and standards (e.g., OSHA, ANSI, etc.). Failure to properly evaluate, select, and use a 3M product and appropriate safety products, or to meet all applicable safety regulations, may result in injury, sickness, death, and/or harm to property.

Warranty, Limited Remedy, and Disclaimer

Unless a different warranty is specifically stated on the applicable 3M product packaging or product literature (in which case such warranty governs), 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR ARISING OUT OF A COURSE OF DEALING, CUSTOM, OR USAGE OF TRADE. If a 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

Limitation of Liability

Except for the limited remedy stated above, and except to the extent prohibited by law, 3M will not be liable for any loss or damage arising from or related to the 3M product, whether direct, indirect, special, incidental, or consequential (including, but not limited to, lost profits or business opportunity), regardless of the legal or equitable theory asserted, including, but not limited to, warranty, contract, negligence, or strict liability.



Your local distributor:

3M Purification Inc.
3M Separation and Purification Sciences Division
400 Research Parkway
Meriden, CT 06450 USA

Phone 1-800-243-6894
1-203-237-5541
Web 3MPurification.com

3M is a trademark of 3M Company.
©2019 3M Company. All rights reserved. Please recycle.
70020188838 REV 0919srao